
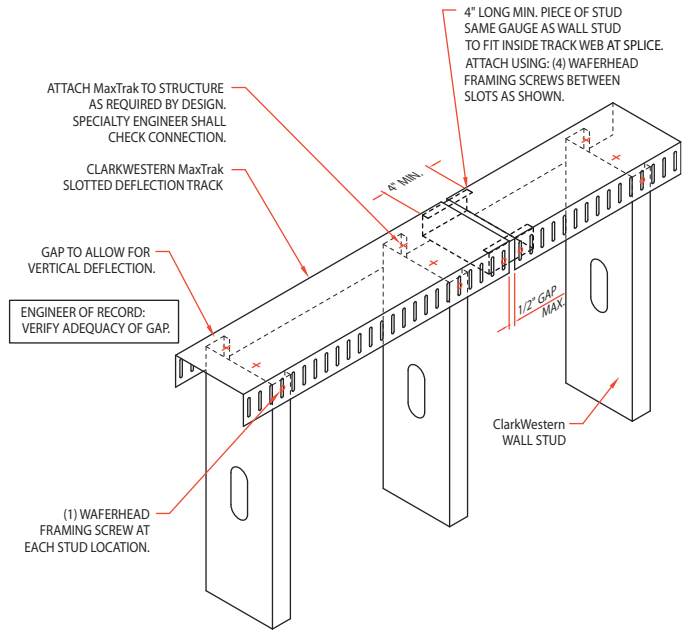


MaxTrak™ Slotted Deflection Track.

MaxTrak (SLT) is a head-of-wall deflection track that is used for framing exterior curtain walls and non-load bearing interior walls where vertical deflection occurs—and serves as a connecting member that isolates the cold-formed steel framing system from the movement of the primary structure. The slots in the leg are designed for a total allowable vertical movement of 1-1/2" (3/4"±).

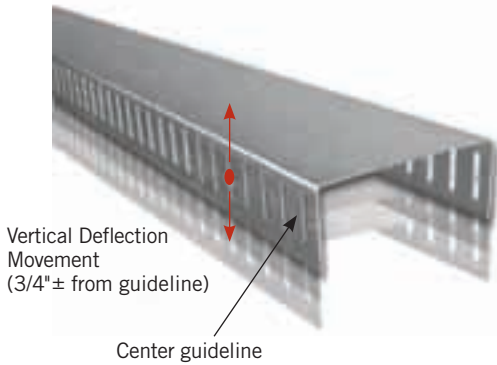

1 SLOTTED DEFLECTION TRACK DETAIL

MaxTrak WITH TRACK SPLICE

Details shown in this brochure are for examples only. The engineer of record of the project is responsible for the design of the connection to the structure. Additional connection details can be found at clarkwestern.com.

Ordering information:

MaxTrak Slotted Deflection Track

Part number	Description	Web width	Leg length	Mils	Gauge	KSI	Coating	Weight (lb/ft)	Standard length (ft)	Pieces/Skid
75024	250SLT250-33	2-1/2"	2-1/2"	33	20	33	G60	.83	10	112
75025	250SLT250-43	2-1/2"	2-1/2"	43	18	33	G60	1.08	10	112
75026	250SLT250-54	2-1/2"	2-1/2"	54	16	50	G60	1.35	10	112
75027	250SLT250-68	2-1/2"	2-1/2"	68	14	50	G60	1.70	10	112
75034	362SLT250-33	3-5/8"	2-1/2"	33	20	33	G60	.95	10	160
75035	362SLT250-43	3-5/8"	2-1/2"	43	18	33	G60	1.24	10	160
75036	362SLT250-54	3-5/8"	2-1/2"	54	16	50	G60	1.56	10	160
75037	362SLT250-68	3-5/8"	2-1/2"	68	14	50	G60	1.95	10	160
75044	400SLT250-33	4"	2-1/2"	33	20	33	G60	1.00	10	144
75045	400SLT250-43	4"	2-1/2"	43	18	33	G60	1.30	10	144
75046	400SLT250-54	4"	2-1/2"	54	16	50	G60	1.62	10	144
75047	400SLT250-68	4"	2-1/2"	68	14	50	G60	2.04	10	144
75064	600SLT250-33	6"	2-1/2"	33	20	33	G60	1.22	10	96
75065	600SLT250-43	6"	2-1/2"	43	18	33	G60	1.59	10	96
75066	600SLT250-54	6"	2-1/2"	54	16	50	G60	1.99	10	96
75067	600SLT250-68	6"	2-1/2"	68	14	50	G60	2.50	10	96
75084	800SLT250-33	8"	2-1/2"	33	20	33	G60	1.44	10	80
75085	800SLT250-43	8"	2-1/2"	43	18	33	G60	1.88	10	80
75086	800SLT250-54	8"	2-1/2"	54	16	50	G60	2.36	10	80
75087	800SLT250-68	8"	2-1/2"	68	14	50	G60	2.97	10	80